


M12 S-coding Angled Connector, Molded Cable, Shielded

Male




CE RoHS IP68

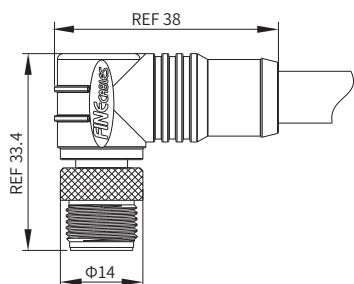

Female



CE RoHS IP68



Specifications

Contacts	4(3+PE)
Certification	UL US PVVA(PVVA7).E496340
Pin layout(Male)	
Pin layout(Female)	
Standard	IEC-61076-2-111
Ambient temperature	-25°C ~ +85°C (flexible installation) , -40°C ~ +85°C (fixed installation)
Connector insert	TPU; PA
Connector contacts	Brass with gold plated
Connector overmold	TPU
Coupling nut/screw	Brass with nickel plated
Seal/O-ring(of Female)	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤5mΩ
Shielding	Available
IP rating	IP67, IP68 in locked condition
Mating endurance	>500 cycles
Rated current	12 A
Rated voltage	630V
Wire gauge	1.25 mm² (AWG 16)

Part Number

Pins	Cable length	Male		Female	
		PVC	PUR	PVC	PUR
4(3+PE)	1m	MA12MSSF04RA-10CB125	MA12MSSF04RA-10RB125	MA12FSSF04RA-10CB125	MA12FSSF04RA-10RB125
	3m	MA12MSSF04RA-30CB125	MA12MSSF04RA-30RB125	MA12FSSF04RA-30CB125	MA12FSSF04RA-30RB125
	5m	MA12MSSF04RA-50CB125	MA12MSSF04RA-50RB125	MA12FSSF04RA-50CB125	MA12FSSF04RA-50RB125

Default wire colors

Pin No.		
Pin 1	BN	RD
Pin 2	BK	WH
Pin 3	BU	GN
⏏	YE/GN	YE/GN
Shell	Braid	