



CREKEN

Online Data Sheet

인크리멘탈 마그네틱 로터리 엔코더 - Ø24mm

WDG 24C 시리즈

Wachendorff Automation

... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

Encoder WDG 24C

www.wachendorff-automation.com/wdg24c

IndustrieROBUST



1. 초소형, 초경량 로터리 엔코더
2. 1~1024PPR 지원
3. 최대 IP67의 보호기능
4. Hall 방식으로 고정밀 측정 가능
5. CE 인증 및 UL 인증 제품

Resolution	
Max. pulses per revolution PPR	1 PPR up to 128 PPR, 256 PPR, 512 PPR, 1024 PPR

Housing	
Flange	synchro flange
Flange material	aluminum
Housing cap	aluminum
Housing	Ø 24 mm

Shaft material	stainless steel
Starting torque	approx. 0.2 Ncm at ambient temperature

Shaft	Ø 6 mm
Shaft length	L: 12 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	50 N

Bearings type	2 precision ball bearings
Nominale service life	0.55 x 10 ⁹ revs. at 100 % rated shaft load 8.5 x 10 ¹⁰ revs. at 40 % rated shaft load 6.8 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	6.8 x 10 ¹¹ revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 40 mA
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 40 mA
Output circuit	TTL, RS422 compatible, inv. TTL HTL HTL inv.


Pulse frequency	≤ 64 ppr: max. 20 kHz ≤ 1024 ppr: max. 200 kHz
Channels	AB ABN and inverted signals
Load	max. 30 mA / channel
Circuit protection	no

Phase offset	at 1 ppr up to 256 ppr: $90^\circ \pm \text{max. } 10\%$ of the pulse length at 512 ppr: $90^\circ \pm \text{max. } 20\%$ of the pulse length at 1024 ppr: $90^\circ \pm \text{max. } 23\%$ of the pulse length
pulse-/pause-ratio	at 1 ppr up to 128 ppr: $50\% \pm \text{max. } 10\%$ at 256 ppr, 512 ppr, 1024 ppr: $50\% \pm \text{max. } 20\%$

Weight	approx. 50 g
Connections	cable or connector outlet
Protection rating (EN 60529)	IP65 all around with SK6, housing IP40 with K7, L7
Operating temperature	-20 °C up to +80 °C
Storage temperature	-20 °C up to +80 °C

General technical data and safety instructions
<http://www.wachendorff-automation.com/gtd>


Options
<http://www.wachendorff-automation.com/acc>

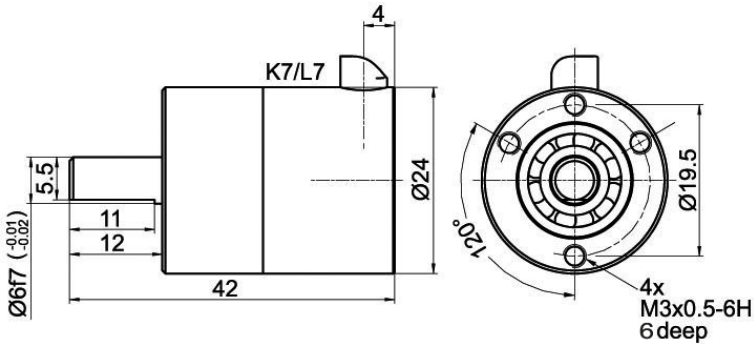Cable connection K7, L7 (IP40) with 2 m cable

Description	ABN inv. poss.
K7 radial, shield not connected (IP40)	•
L7 radial, shield connected to encoder housing (IP40)	•

Assignments		
	K7, L7	K7, L7
Circuit	N05, N30	M05, M30
GND	WH	WH
(+) Vcc	BN	BN
A	GN	GN
B	YE	YE
N	GY	GY
Light reserve warning	-	-
A inv.	-	RD
B inv.	-	PK, (BK at ACA)
N inv.	-	BU, (VT at ACA)
Shield	flex	flex

Connector SK6, 6-pin

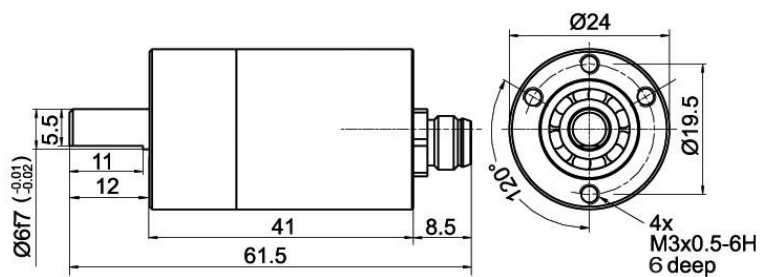

Description

ABN inv. poss.

SK6 axial, 6-pin, Connector connected to encoder housing

-

Assignments	
	SK6
	6-pin
Circuit	N05, N30
GND	3
(+) Vcc	2
A	4
B	5
N	1
Light reserve warning	-
A inv.	-
B inv.	-
N inv.	-
n. c.	6
Shield	-

Options

Low-friction bearings

Order key

The encoder WDG 24C is also available as a particularly smooth-running low-friction encoder. The starting torque is thereby changed to ≤ 0.1 Ncm and the protection class at the shaft input to IP50.

AAC

IP67 all around (with connector SK6 only)

Order key

The encoder WDG 24C can be supplied in a full IP67 version. Resistance to salt mist (IEC 60068-2-11) after 672 hours

AAO

Max. RPM: 3500 rpm

Permitted Shaft-Loading, axial: 30 N

Permitted Shaft-Loading, radial: 45 N

Max. PPR: 1024 ppr

Starting-torque: approx. 1.2 Ncm at ambient temperature

Low temperature

Order key

The encoder WDG 24C with the output circuit types M05, N05, M30, N30 is also available with the extended temperature range -40 °C up to +80 °C (measured at the flange).

ACA

Cable length

Order key

The encoder WDG 24C can be supplied with more than 2 m cable. The max. permissible cable length is 10 metres with the output circuit M05 and N05.

XXX = Decimeter

With output circuit M30 and N30 max. 25 m. The maximum cable length depends on the supply voltage and the frequency; see www.wachendorff-automation.com/atd

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.

Example: 5 m cable = 050

Example Order No.	Type					Your encoder
WDG 24C	WDG 24C					WDG 24C
	Pulses per revolution PPR:					
64	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 256, 512, 1024 Other PPRs on request					
	Channels:					
ABN	AB, ABN					
	Output circuit					
M30	Resolution PPR	Power supply VDC	Output circuit	Light reserve warning	Order key	
	16, 32, 64	4.75 - 5.5	TTL, RS422 comp., inverted	-	M05	
		4.75 - 5.5	TTL	-	N05	
	1-128, 256, 512, 1024	5 - 30	HTL inverted	-	M30	
		5 - 30	HTL	-	N30	
	Electrical connections					
K7	Description			ABN inv. poss.	Order key	
	Cable: length (2 m standard, WDG 58T: 1 m)					
	radial, shield not connected (IP40)			•	K7	
	radial, shield connected to encoder housing (IP40)			•	L7	
	Connector: (shield connected to encoder housing)					
	connector, M8x1, 6-pin, axial			-	SK6	
	Options					
	Description			Order key		
	Low-friction bearings			AAC		
	IP67			AAO		
	Low temperature			ACA		
	Without option			Empty		
	Cable length			XXX = Decimeter		

Example Order No. =	WDG 24C	64	ABN	M30	K7		WDG 24C						Your encoder
----------------------------	---------	----	-----	-----	----	--	---------	--	--	--	--	--	---------------------



For further information please contact our local distributor.
Here you find a list of our distributors worldwide.
http://www.wachendorff-automation.com/distributors_worldwide.html

CREKEN

주식회사 크레켄

경기도 성남시 중원구 사기막골로 124
SKn테크노파크 메가동 514호 우편번호:13207

Phone: 031) 608-3200 Fax: 031) 776-2320
E-Mail: sales@creken.co.kr
www.creken.co.kr



Wachendorff Automation GmbH & Co. KG
Industriestrasse 7 • D-65366 Geisenheim

Phone: +49 67 22 / 99 65 25
Fax: +49 67 22 / 99 65 70
E-Mail: wdg@wachendorff.de
www.wachendorff-automation.de

