



Online Data Sheet

Encoder WDG 58M SSI

www.wachendorff-automation.com/wdgf58mssi

Wachendorff Automation

... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

Encoder WDG58M Motorfeedback SSI



- Highest precision in highly dynamic movement
- Interface: SSI
- Singleturn max. 19 Bit
- Electronic ID label
- 2-colour-LED as indicator for operating condition and error message
- Specific spring lever available

www.wachendorff-automation.com/wd58mssi

Mechanical Data

Housing

Flange	Motorfeedback flange
Flange material	aluminum
Housing cap	aluminum
Housing	Ø 58 mm

Shaft(s)

Starting torque	approx. 1 Ncm at ambient temperature
-----------------	--------------------------------------

Shaft	Ø Conus 1/10; 9.25 mm
Shaft length	L: 16.5 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	60 N

Bearings

Bearings type	2 precision ball bearings
Nominal service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

Electrical Data

Power supply/Current consumption	3.5 VDC up to 30 VDC: typ. 160 mA
Power consumption	max. 0.6 W
Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 80 mA
Power consumption	max. 0.6 W

Sensor data

Single-turn technology	optical
Single-turn resolution	max. 524,288 steps/360° (19 bit)
1 Vpp resolution	2048 sin/cos (512, 1024 optional)
Channels output	AB
Limit frequency (-3dB)	400 kHz

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3


Vibration:	50 m/s ² (10 Hz up to 2000 Hz) (DIN EN 60068-2-6)
Shock:	1000 m/s ² (6 ms) (DIN EN 60068-2-27)
Design:	according DIN VDE 0160

Interface


Interface:	SSI
Clock input:	via opto-coupler
Clock frequency:	100 kHz up to 2 MHz
Data output:	RS485
Out put code:	gray or binary
SSI output:	Angular-/position value
Paritybit:	optional (even/odd)
Errorbit:	optional

Configuration inputs	DIR = GND -> cw Positive direction: (View on shaft) DIR = +UB -> ccw
Set to zero:	Set: SET = +UB Deactivate: SET = GND

Transmission protocol SSI Single transmission

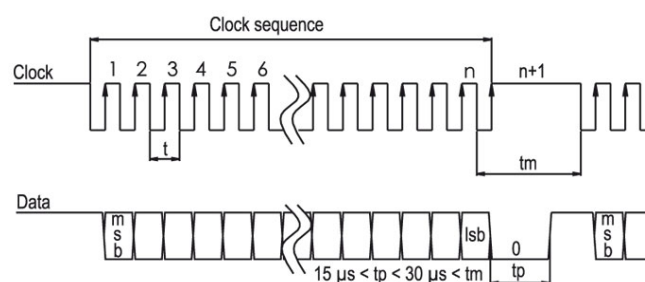

Transmission protocol SSI Multipath transmission

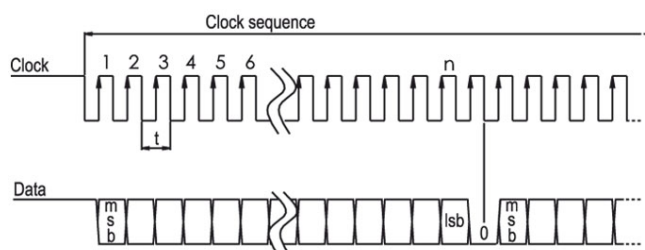


General Data

Weight	approx. 279 g
Connections	cable output, 2 m, tangential
Protection rating (EN 60529)	IP67, shaft sealed to IP65
Operating temperature	-40 °C up to +115 °C
Storage temperature	-40 °C up to +115 °C

More Information

General technical data and safety instructions
<http://www.wachendorff-automation.com/gtd>

Options
<http://www.wachendorff-automation.com/acc>

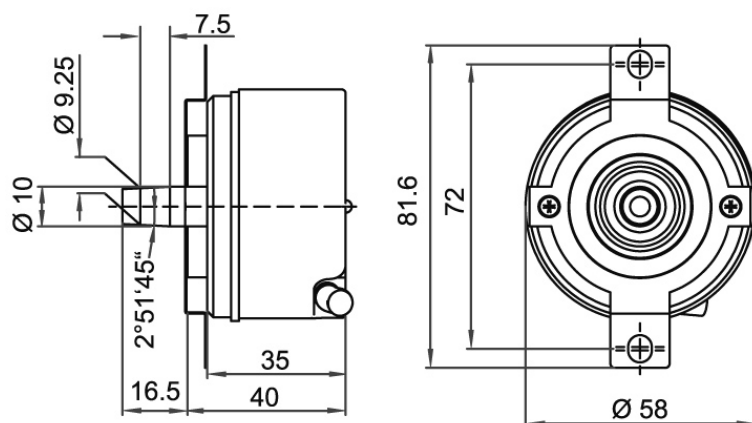Cable outlet tangential, 2 m, T3

Description
T3 tangential, flex

Assignments	
	T3
A+	GYPK
A-	RDBU
B+	BK
B-	VT
Data+	GY
Data-	PK
CLK+	GN
CLK-	YE
(+) Vcc	BN
GND	WH
Shield	flex
SET	BU
DIR	RD

Options

Cable lenght

The encoder WDGF 58M SSI can be supplied with more than 2 m cable.
Please extend the standard order code with a three figure number, specifying the cable length in decimetres.
5 m cable = 050
10 m cable = 100

Order key

XXX = Decimeter

Example Order No.	Type	Your encoder	
WDGF 58M	WDGF 58M	WDGF 58M	
	Shaft	Order key	
10	Ø Conus 1/10; 9.25 mm	10	
	Single-turn Resolution	Order key	
13	9 bit up to 19 bit (EG: 13 bit = 13)	13	
	Multi-turn Resolution	Order key	
00	No Multi-turn = 00	00	
	Sinus per revolution 1Vpp	Order key	
11	2048	11	
	512 (optional)	9	
	1024 (optional)	10	
	Data protocol	Order key	
SI	SSI	SI	
	Software	Order key	
A	up to date release	A	
	Code	Order key	
B	binary	B	
	gray	G	
	Power supply	Order key	
2	3,5 V up to 30 V (standard)	2	
	4.75 V up to 5.5 V	1	
	Galvanic isolation	Order key	
1	yes	1	
	no	0	
	Electrical connections	Order key	
T3	Cable:		
	tangential, flex, with 2 m cable, IP67	T3	
	Options	Order key	
	Without option	Empty	
	Cable lenght	XXX = Decimeter	

Example Order No.	WDGF 58M	10	13	00	11	SI	A	B	2	1	T3	
-------------------	----------	----	----	----	----	----	---	---	---	---	----	--

WDGF 58M												Example Order No.
----------	--	--	--	--	--	--	--	--	--	--	--	-------------------



For further information please contact our local distributor.
Here you find a list of our distributors worldwide.
http://www.wachendorff-automation.com/distributors_worldwide.html

CREKEN

주식회사 크레켄

경기도 성남시 중원구 사기막골로 124
SKn테크노파크 메가동 514호 우편번호:13207

Phone: 031) 608-3200 Fax: 031) 776-2320
E-Mail: sales@creken.co.kr
www.creken.co.kr



Wachendorff Automation GmbH & Co. KG
Industriestrasse 7 • D-65366 Geisenheim

Phone: +49 67 22 / 99 65 25
Fax: +49 67 22 / 99 65 70
E-Mail: wdg@wachendorff.de
www.wachendorff-automation.de

