

Datasheet

Draw-wire system SZG60

www.wachendorff-automation.com

Wachendorff Automation

... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

Rugged draw-wire system SZG60



- Ball bearing drill protection
- Measuring rope (stainless steel)
- Bushing
- Quick and easy mounting

www.wachendorff-automation.com

Mechanical Data

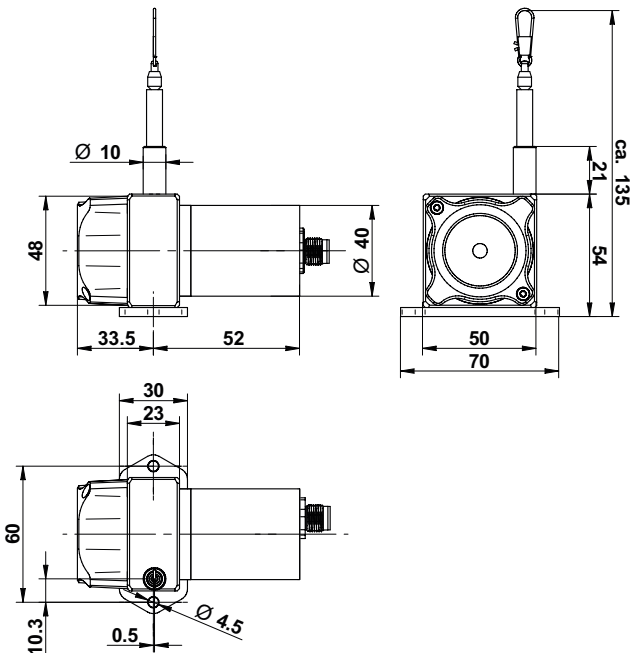
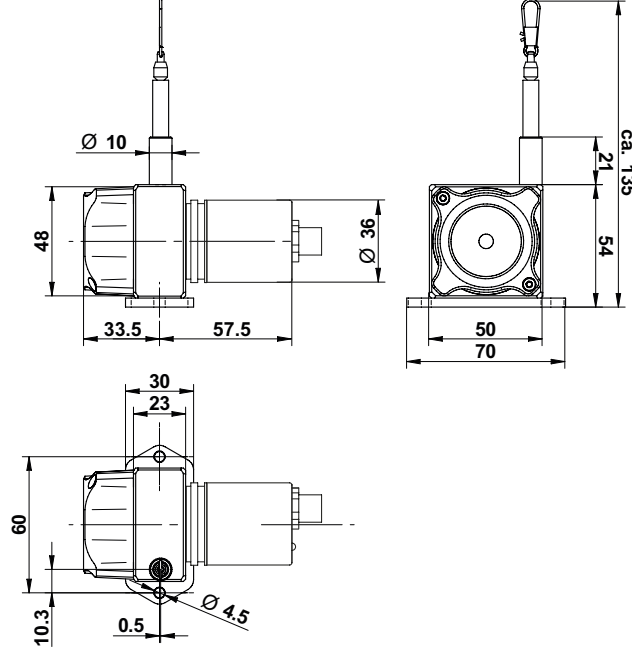
Measurement range	Extraction force		Speed	Acceleration
[mm]	F_{min} [N]	F_{max} [N]	V_{max} [m/s]	a_{max} [m/s ²]
1250	4.6	5.6	10	300

Technical data digital output incremental

Measurement range	[mm]	1250
Linearity	[%]	±0.05 (independent of the measurement range)
Disc circumference	[mm]	125
Selectable resolution	[Pulses/mm]	4; 10; 20 (the resolution can be raised by the factor 4 using quadruple edge detection)
Sensor element		Incremental-Encoder with optical code disk
Output signal		A, B pulse (plus inverted pulses /A, /B)
Connection		connector output M12
Humidity		maximum 90 % relative, no condensation
Temperature range	[°C]	-20 °C up to +80 °C
Mechanical data		extraction force, maximum velocity and maximum acceleration see „mechanical data“
Weight	[g]	300 to 500, depending on the measurement range
Housing		aluminium, anodised, spring case PA6
Order No:		4 Pulse/mm: SZG60012500500ABR24SB8 10 Pulse/mm: SZG60012501250ABR24SB8 20 Pulse/mm: SZG60012502500ABR24SB8

Technical data digital output absolute, CANopen (CAN), SSI

		CANopen (CAN)	SSI
Measurement range	[mm]	1250	
Linearity	[%]	±0.05 (independent of the measurement range)	
Disc circumference	[mm]	125	
Standard resolution	[Steps/mm]	32.77 (corresponds to 0.03 mm [12 bit])	
Sensor element		Multiturn-Absolute-Encoder, magnetic	
Connection		connector output M12	
Humidity		max. 90 % relative, no condensation	
Temperature	[°C]	-20 °C up to +85 °C	
Mechanical data		extraction force, maximum velocity and maximum acceleration see „mechanical data“	
Weight	[g]	300 to 500, depending on the measurement range	
Housing		aluminium, anodised, spring case PA6	
Order No:		SZG6001251218COAB00CB5	SZG6001251212SIAG01CB8

Technical drawing digital output incremental	Technical drawing digital output absolute CANopen (CAN), SSI
	

WARNING NOTICES

- Don't let the rope snap back. If the rope is retracted freely, this may lead to injuries (whiplash effect) and the device may be damaged. Caution when unhooking and retracting the rope into the sensor.
- Never exceed the specified measurement range when extracting the rope!
- Do not try to open the device. The stored energy of the spring drive may lead to injuries when being mishandled.
- Do not touch the rope when operating the sensor.
- Avoid guiding the rope over edges or corners. Use a deflection pulley instead.
- Do not operate the sensor if the rope is buckled or damaged. A ripping of the rope may lead to injuries or a damaging of the sensor.

Technical data incremental encoder

Resolution

Max. pulses per revolution 500, 1250, 2500 ppr
PPR

Mechanical Data

Housing

Flange	Pilot flange
Flange material	aluminum
Housing cap	aluminum, powder coated
Housing	Ø 40 mm
Cam mounting	pitch 51 mm

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 0.2 Ncm at ambient temperature

Shaft	Ø 6 mm
Shaft length	L: 12 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	50 N

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply VDC	10 - 30 VDC
Current consumption	typ. 70 mA
Signal shape	square-wave
Output circuit	HTL inverted
Channels	AB and inverted signals
Output	push-pull
Load	max. 40 mA / channel
Signal level mA	at 20 mA
Signal level H>	H > V _{cc} - 2.5 VDC
Signal level L<	L < 2.5 VDC
Output frequency	max. 200 kHz
Circuit protection	yes
Light reserve warning	no

General Data

Connections	connector outlet M12
Protection rating (EN 60529)	Housing: IP65, shaft sealed: IP65

Sensor-connector (M12x1) SB, 8-pin

Description

SB8 axial, 8-pin, Connector connected to encoder housing

Assignments	
	SB8
	8-pin
	
Circuit	R24
GND	1
(+) Vcc	2
A	3
B	4
Light reserve warning	-
A inv.	6
B inv.	7
n. c.	5, 8
Shield	-

Technical data absolute encoder CANopen

Mechanical Data

Housing

Flange	synchro flange
Flange material	aluminum
Housing cap	steel case chrome-plated, magnetic shielding
Housing	Ø 36 mm

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 0.3 Ncm at ambient temperature

Shaft	Ø 6 mm
Shaft length	L: 11.5 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	50 N

Bearings

Bearings type	2 precision ball bearings
Nominal service life	1.4 x 10 ⁸ revs. at 100 % rated shaft load 2 x 10 ⁹ revs. at 40 % rated shaft load 1.7 x 10 ¹⁰ revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	1000 a
Mission time (TM)	20 a
Nominal service life (L10h)	1.7 x 10 ¹⁰ revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	10 VDC up to 32 VDC: typ. 50 mA
Power consumption	max. 0.5 W

Sensor data

Single-turn technology	innovative hall sensor technology
Single-turn resolution	4096 steps/360° (12 bit)
Single-turn accuracy	< ±0.35°
Single-turn repeat accuracy	< ±0.20°
Internal cycle time	≤ 600 µs

Multi-turn technology	patented EnDra® technology no battery and no gear.
-----------------------	--

Multi-turn resolution	18 bit
-----------------------	--------

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	300 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Design:	according DIN VDE 0160
Turn on time:	<1,5 s

Interface

Interface:	CAN
Protocol:	CANopen - Communication profil CiA 301 - Device Profile for encoder CiA 406 V3.2 class C2
Node number:	1 up to 127 (default 127)
Baud rate:	10 kBaud up to 1 MBaud with automatic bit rate detection.
Advice:	The standard settings as well as any customization in the software can be changed via LSS (CiA 305) and the SDO protocol, e. g. PDOs, Scaling, Heartbeat, Node-ID, Baud rate, etc.
Programmable CAN transmission modes:	Synchronous mode: when a synchronisation telegram (SYNC) is received from another bus node, PDOs are transmitted independently. Asynchronous mode: a PDO message is triggered by an internal event. (e.g. change of measured valued, internal timer, etc.)

General Data


Connections	connector outlet M12
Protection rating (EN 60529)	Housing: IP65, shaft sealed: IP65

Connector, M12x1 CB5, 5-pin

Description

CB5 axial, 5-pin, shield connected to encoder housing

Assignments

	CB5
	
(+) Vcc	2
GND	3
CANHigh	4
CANLow	5
CANGND shield	1

Technical data absolute encoder SSI

Mechanical Data

Housing

Flange	synchro flange
Flange material	aluminum
Housing cap	steel case chrome-plated, magnetic shielding
Housing	Ø 36 mm

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 0.3 Ncm at ambient temperature

Shaft	Ø 6 mm
Shaft length	L: 11.5 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	50 N

Bearings

Bearings type	2 precision ball bearings
Nominal service life	1.4 x 10 ⁸ revs. at 100 % rated shaft load 2 x 10 ⁹ revs. at 40 % rated shaft load 1.7 x 10 ¹⁰ revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	1000 a
Mission time (TM)	20 a
Nominal service life (L10h)	1.7 x 10 ¹⁰ revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	10 VDC up to 32 VDC: typ. 50 mA
Power consumption	max. 0.5 W

Sensor data

Single-turn technology	innovative hall sensor technology
Single-turn resolution	4096 steps/360° (12 bit)
Single-turn accuracy	< ±0.35°
Single-turn repeat accuracy	< ±0.20°

Internal cycle time	≤ 600 µs
Multi-turn technology	patented EnDra® technology no battery, no gear.
Multi-turn resolution	12 bit.

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Design:	according DIN VDE 0160
Turn on time:	<1,5 s

Interface

Interface:	SSI
Clock input:	via opto-coupler
Clock frequency:	100 kHz up to 500 kHz
Data output:	RS485/RS422 compatible
Output code:	gray
SSI output:	Angular-/position value
Turn on time:	<1,5 s

Configuration inputs

Positive direction of counting: (View on shaft)	DIR = GND -> cw DIR = +UB -> ccw
Set to zero:	Set: Preset = +UB for 2 s Deactivate: Preset = GND
At Start / while booting:	- red gleam (< 2.3 s)
Malfunction:	- constant red gleam (> 2.3 s)
Normal function:	- constant green gleam
No supply:	- no gleam

General Data

Connections	connector outlet M12
Protection rating (EN 60529)	Housing: IP65, shaft sealed: IP65

Connector, M12x1, CB8, axial, 8-pin

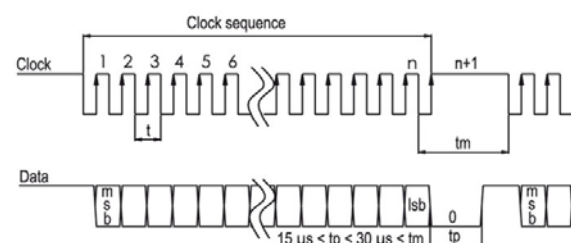
Description

CB8 axial, 8-pin, shield connected to encoder housing

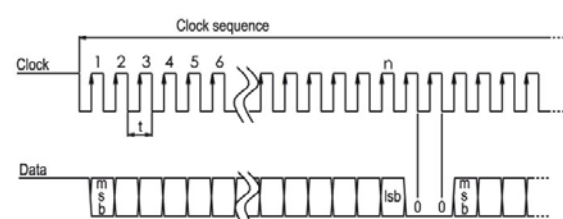
Assignments

	CB8
GND	1
(+) Vcc	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	housing

Transmission protocol SSI Single transmission:



Transmission protocol SSI Multipath transmission:





For further information please contact our local distributor.
Here you find a list of our distributors worldwide.
http://www.wachendorff-automation.com/distributors_worldwide.html



Wachendorff Automation GmbH & Co. KG
Industriestrasse 7 • D-65366 Geisenheim

Tel.: +49 (0) 67 22 / 99 65 - 25
Fax: +49 (0) 67 22 / 99 65 - 70
E-Mail: wdg@wachendorff.de
www.wachendorff-automation.com

