
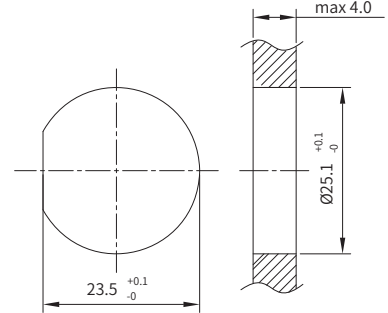



■ Optical Fiber Panel Type SC Adapter Connector

- Connector series: SC
- Gender: Jack
- Mating Style: 3 Points Lock Bayonet
- Mounting type: Rear fastened
- Part No.: FB-WMSCPQ



Recommended Panel Cut-Out

RoHS




■ General information

Standard:	IEC 61754
Ambient temperature:	-40°C ~ +105°C
Connector nut/screw:	PA+GF
Connector body:	PA+GF
Seal / O-ring:	Silicone

Insertion Loss:	≥0.3db
Return Loss:	≤30db
Mechanical durability:	>500
Operation wavelength:	1310nm~1550nm~850nm
IP rating:	IP67 In locked condition

■ M8 Protection Cap for Female Molded Cable Connector

- Connector series: LC
- Gender: Jack
- Mating Style: 3 Points Lock Bayonet
- Mounting type: Rear fastened
- Part No.: FB-WMLCPQ

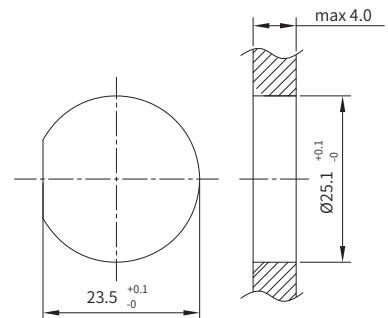

Recommended Panel Cut-Out

RoHS

■ General information

Standard:	IEC 61754
Ambient temperature:	-40°C ~ +105°C
Connector nut/screw:	PA+GF
Connector body:	PA+GF
Seal / O-ring:	Silicone

Insertion Loss:	≥0.3db
Return Loss:	≤30db
Mechanical durability:	>500
Operation wavelength:	1310nm~1550nm~850nm
IP rating:	IP67 In locked condition